

1326

# ProxCard® II

## Proximity Access Card

### Application

The RF-programmable ProxCard II proximity access card is the industry choice for a cost-effective solution to proximity access control.

### Features

- Offers universal compatibility with all HID proximity readers.
- Provides durable packaging and consistent read range.
- Provides an external number for easy identification and control.
- Supports formats up to 85 bits, with over 137 billion codes.
- Custom pre-printed artwork available.
- A PVC overlay allows for on-site photo ID using most direct image printers.
- Using HID's ProxProgrammer, card vendors can ship ProxCard II proximity cards, custom programmed to their customers' requirements, from their own inventory. Enables smaller order quantities and overnight delivery. (Check with vendor for availability.)



Works with HID's pcProx!



An ASSA ABLOY Group company



# ProxCard® II

## Features

### Proven, Reliable Technology

Offers extremely consistent read range. Unaffected by body shielding or variable environmental conditions, even when close to keys and coins.

### Convenient To Use

Can fit into a wallet or purse. Use with a strap and clip as a photo ID badge.

### Cross-reference

A cross-reference list correlating the external card number and the programmed ID number is provided for easy system administration.

### Security

Offers over 137 billion unique codes.

### Long Life

Passive, no-battery design allows for an infinite number of reads.

### Durability


Strong, flexible and resistant to cracking and breaking.

### Companion Products:

1321 Photo pouch overlay  
1324 PVC Direct print overlay

### Warranty

Warranted against defects in materials and workmanship for life from date of shipment. See complete warranty policy for details.

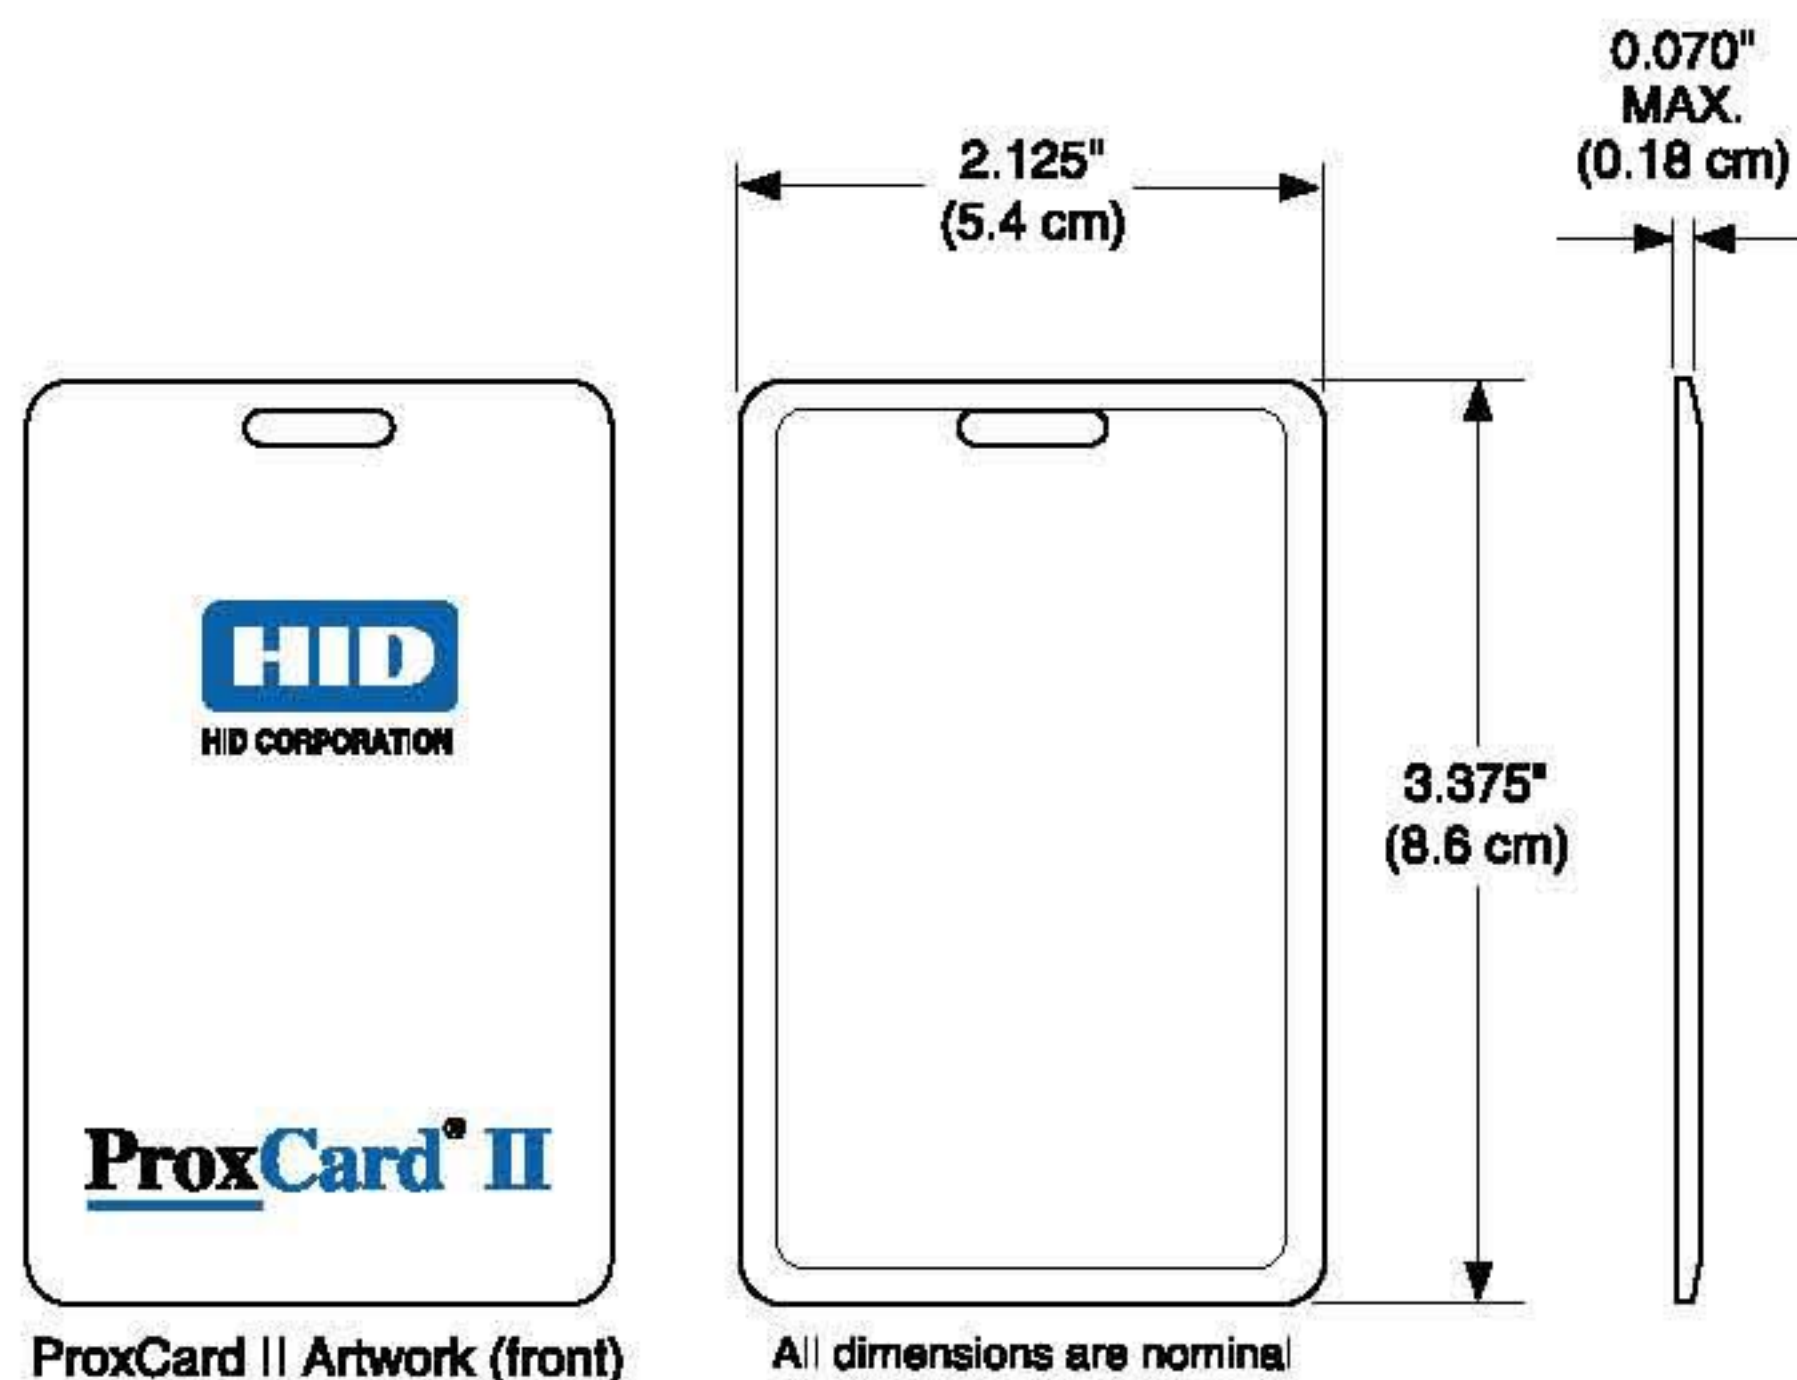

## Specifications

### Typical maximum\* read range

MiniProx® reader-up to 5.5" (14 cm)  
ThinLine II® reader-up to 5.5" (14 cm)  
ProxPoint® Plus reader-up to 3" (7.5 cm)  
ProxPro® reader-up to 8" (20 cm)  
MaxiProx® reader-up to 24" (60 cm)

\* Dependent on local installation conditions.

### Dimensions

3.375" x 2.125" x 0.070" max.  
(8.57 x 5.40 x 0.18 cm)

### Operating temperature

-50° to 160° F (-45° to 70° C)

### Weight

0.24 oz. (6.8 gm)

### Part Number

Base Part No.: 1326

### Description

RF-programmable, 125 kHz, HID artwork, customer-specified ID numbers, vertical slot punch.

### Options

- External card numbering (inkjet only; no laser engraving)
- Custom artwork (text or graphics)

(Please see "How to Order Guide" for a description of the options and associated part numbers.)

LIT1326DS 6/01, supersedes 11/99

